


**Name:** Robert Battle  
**Date:** 3/25/2015  
**Track:** R/C Tracks Las Vegas

**Track Conditions**  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


**Result**  
 Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_

### Front Suspension




Rebound Stop: 103


Upright:  E2129  
 E2105-B  
 Tension Rod:  E2107A(Long)  
 E2107B(Short)

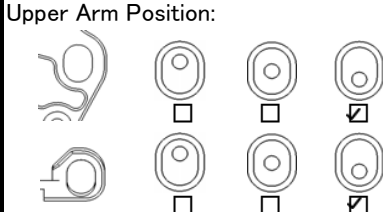

Ride Height: 24mm  
 Toe Angle: -2  
 Kingpin Ball Spacer(Upper): 1mm  
 (Lower): 1mm  
 Wheel Hub: +1  
 Anti Roll Bar: 2.3  
 Upper Arm Spacer: 2mm

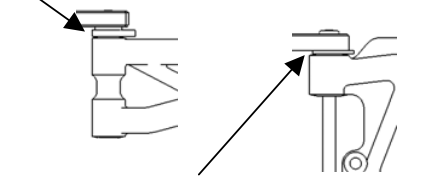


Lower Arm Spacer: \_\_\_\_\_  
 Lower Arm Position (Kick Up):

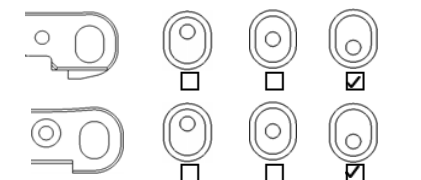

### Front Shocks




Piston: 6 hole 1.3  
 Oil: 500  
 Spring: 9.25

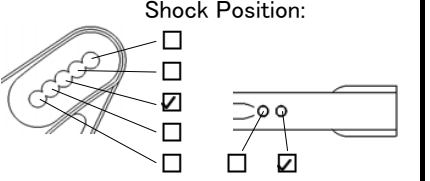


Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)



### Steering Ackerman



### Rear Suspension




Rebound Stop: \_\_\_\_\_



Lower Arm Position (Anti-Squat):




Ride Height: 27mm  
 Camber Angle: -3  
 Wheel Hub: +1  
 Anti Roll Bar: 2.6  
 Lower Arm Spacer: 1mm

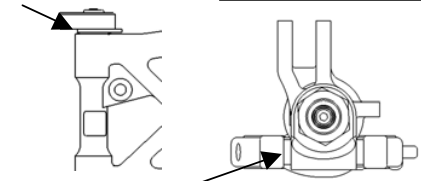

Upright Spacer: 2mm  
 Upright:  E2131  
 Other


Lower Arm Position (Toe Angle):

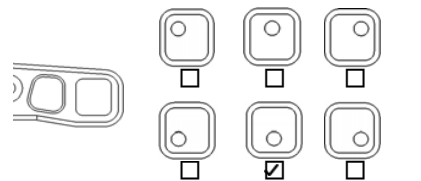

### Rear Shocks




Piston: 6 hole 1.3  
 Oil: 450  
 Spring: 10.75

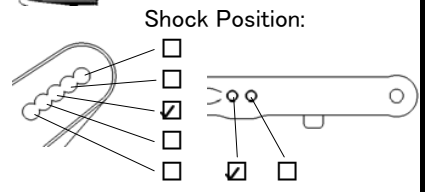

Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight



### Engine

Type: \_\_\_\_\_ Plug: \_\_\_\_\_  
 Gasket: \_\_\_\_\_ Reducer: \_\_\_\_\_  
 Muffler: \_\_\_\_\_ Fuel: \_\_\_\_\_  
 Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: 10 \_\_\_\_\_ O-Ring: \_\_\_\_\_ pcs.  
 Center: 7 \_\_\_\_\_ pcs.  
 Rear: 3 \_\_\_\_\_ pcs.


### Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

### Clutch

Clutch Bell: 13      Spur Gear: 46  
 Clutch Shoes: Ultimate 3 Shoe  
 Clutch Spring: 1.1

### Body/Wing

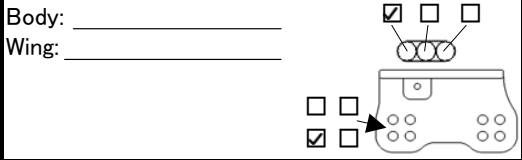

### Comments

.....  
 .....  
 .....