


Name: _____
Date: _____
Track: _____

Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension

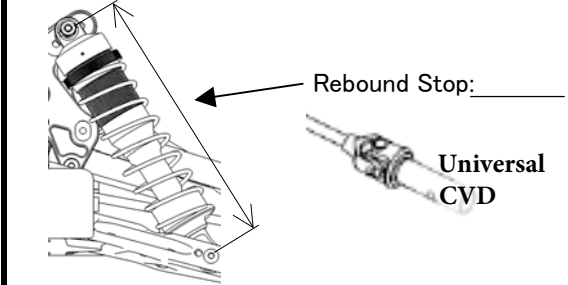

Upright: E2129
 E2105-B
 Tension Rod: E2107A(Long)
 E2107B(Short)
 Upper Arm Position:

Ride Height: _____
 Toe Angle: _____
 Kingpin Ball Spacer(Upper): _____
 (Lower): _____

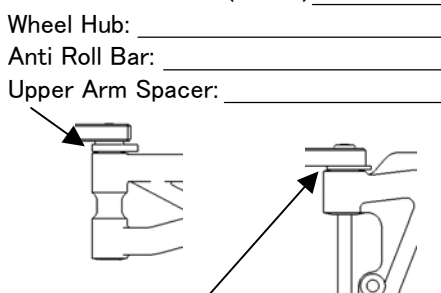


Lower Arm Spacer: _____
 Lower Arm Position (Kick Up):

Front Shocks


Piston: _____
 Oil: _____
 Spring: _____
 Shock Position:

Pivot Ball Position: Front Rear
 Damper Stay: E2502(Aluminum)
 E2511(CFRP)

Steering Ackerman

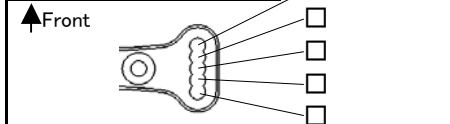


Rear Suspension

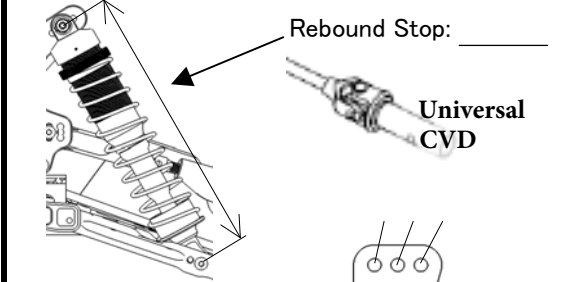

Upper Arm Position:

Lower Arm Position (Anti-Squat):

Ride Height: _____
 Camber Angle: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Lower Arm Spacer: _____

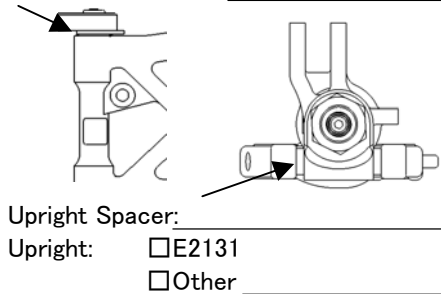


Lower Arm Position (Toe Angle):

Rear Shocks

Piston: _____
 Oil: _____
 Spring: _____
 Shock Position:

Pivot Ball Position: Front Rear
 Damper Stay: E2522(Aluminum)
 E2523(CFRP)

Weight

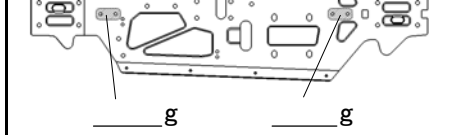

Engine

Type: _____ Plug: _____
 Gasket: _____ Reducer: _____
 Muffler: _____ Fuel: _____
 Engine Mount: E0701(Standard) E2701(One Piece)

Diff. Oil

O-Ring: _____ HT Diff
 Front: _____ pcs.
 Center: _____ pcs.
 Rear: _____ pcs.
 Rear Under-Drive


Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Clutch

Clutch Bell: _____ Spur Gear: _____
 Clutch Shoes: _____
 Clutch Spring: _____

Body/Wing

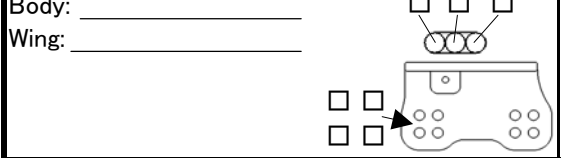

Comments

.....

