


**Name:** Tim Long  
**Date:** 1/26/18  
**Track:** Revalation



**Track conditions**  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy

**Result**  
 Race time / Lap: \_\_\_\_\_  
 Best lap (1Lap): \_\_\_\_\_

### Front suspension

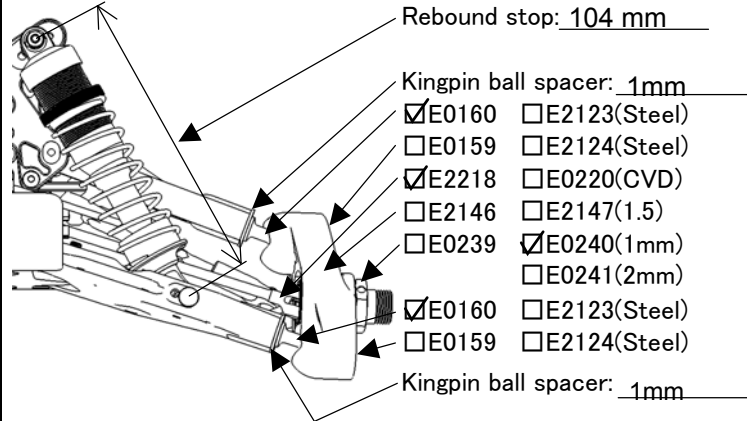


Ride height: 25  
 Toe angle: 1\* out  
 Lower arm plate:  
 E2144A,B  
 E2154(CFRP 1mm)  
 E2155(CFRP 1.2mm)  
 Anti roll bar: 2.2  
 Upper arm spacer: 2mm  
  
 Lower arm spacer: 0

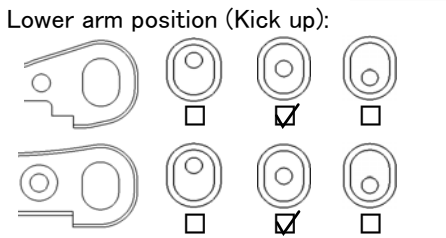

### Front shocks

Piston: 5 hole 1.3 Oil: FP 550  
 Spring: 9.25  
 Shock position:  
  
 Pivot ball position:  Front  Rear  
 Damper stay:  E2562(Aluminum)  
 E2565(CFRP)

### Steering ackerman




### Front upper plate

E2148D  E2158(CFRP)



### Servo saver arm

E2301A  E2310(Aluminum)

### Rear suspension

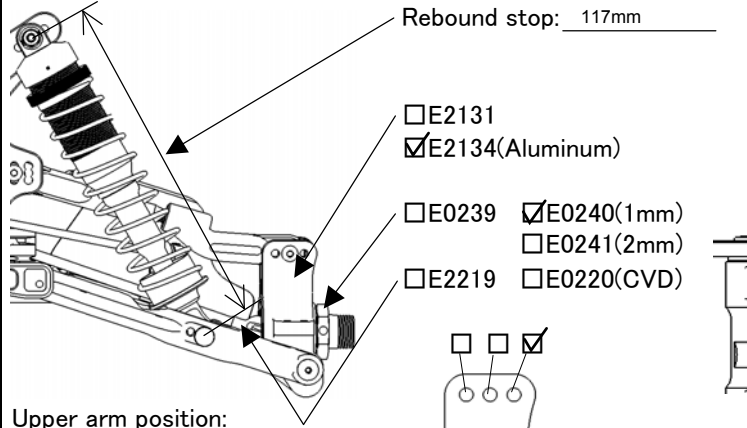

Ride height: 26mm  
 Camber angle: -3  
 Lower arm plate:  
 E2145A,B  
 E2156(CFRP 1mm)  
 E2157(CFRP 1.2mm)  
 Anti roll bar: \_\_\_\_\_  
 Lower arm spacer: \_\_\_\_\_  
  
 Upright spacer: 0

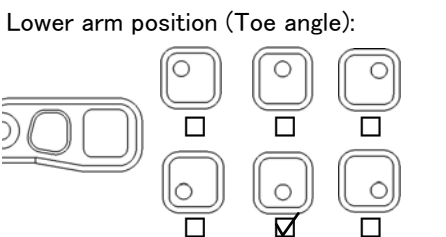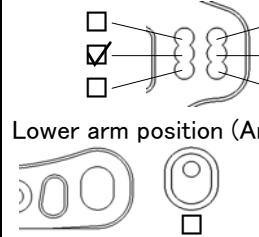

### Rear shocks

Piston: 5 hole 1.3 Oil: FP 400  
 Spring: 10.75  
 Shock position:  
  
 Pivot ball position:  Front  Rear  
 Damper stay:  E2563(Aluminum)  
 E2566(CFRP)

### Center shaft

E0223,E0259  E2228,E2229

### Tension rod

Front:  E2107A(Long)  E2107B(Short)  
 Rear:  E2148C  E0803(Rubber)

### Weight



**Engine**  
 Type: Ninja B04 Plug: P3 Reducer: 8MM  
 Muffler: 2090 Fuel: Flashpoint 30% Gasket: \_\_\_\_\_  
 Engine mount:  E0701(Standard)  Other \_\_\_\_\_


**Diff. Gear** **Oil**  
 Front:  44/13T  42/12T 5  
 Rear:  44/13T  42/12T 5  
 Center:  44T  46T 5  
 47T  48T

**Tires**

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

**Clutch**  3P  4P  
 Clutch bell:  13T  14T  
 Clutch shoes  C0754  E0704  E0710  E2706  
 Clutch spring  0.8  0.9  0.95  1.0  1.05  1.1

### Body/Wing

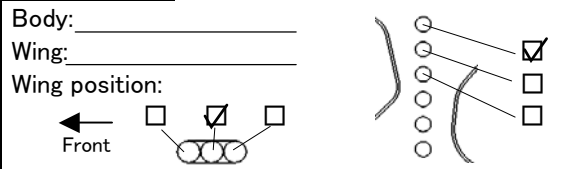

### Comments

.....  
 .....  
 .....