


Name: _____
Date: _____
Track: _____

Track conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Front suspension

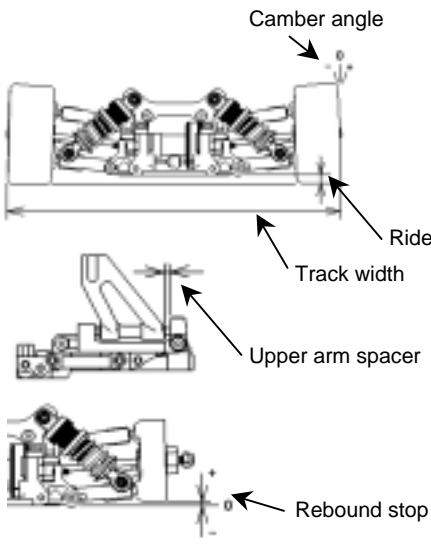

Track width 199 mm
 Ride height 4 mm
 Camber angle -1.5 °
 Upper arm spacer 2 mm
 Toe angle out 1 °
 Rebound stop 2 mm
 Bump stop
 None Use
 Upper arm position 1 mm
 Anti-roll bar

Front shock


Piston Stock
 Oil # 600
 Spring Light blue
 Sock position




Front Diff.

One way
 Gear diff. Oil # _____
 Rigid

Steering ackerman



Rear suspension

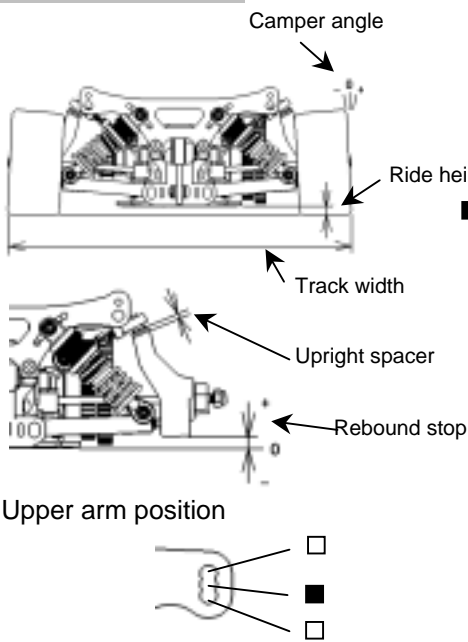


Track width 200 mm
 Ride height 5 mm
 Camber angle -3 °
 Toe angle in 2 °
 Rebound stop 5 mm
 Bump stop
 None Use
 Lower arm position

 Upright spacer 2 mm
 Anti-roll bar Wire
 ϕ 2.1
 Other _____

Rear Shock

Piston Stock
 Oil # 600
 Spring Light blue
 Shock position



Rear Diff.

Oil # 10,000

Engine Type _____
 Gasket _____ mm Muffler _____
 Plug _____ Fuel _____

Tire <Front> Type _____ <Rear> Type _____
 Dia.(start) L /R Dia.(start) L /R
 Dia.(finish) L /R Dia.(finish) L /R

Clutch

Clutch shoe Black Gray Yellow
 Centrifugal shoe Light weight
 Spring Super hard
 Clutch bell clearance 0.4 mm
 Spring adj. Nut position 0.8 mm

Brake pad

Black Other

Body Type _____
 Wing _____

Drive ratio

Gear ratio Side pulley
 1st. 17/59 24T
 2nd. 23/53 25T

Result
 Race time / Lap _____
 Best lap (1Lap) _____

Comments:

